



# PORTABLE EXIT/EMERGENCY LIGHT COMBO INSTRUCTION MANUAL

MODEL: SLIM COMBO

Featuring:

- A** Universal Hanging Lanyards
- B** Recessed Power connection
- C** Battery reset button (always on)
- D** Hard plastic carry case

READ AND FOLLOW ALL SAFETY INSTRUCTIONS!

1. Do not use outdoors.
2. Do not let power supply cords touch hot surfaces.
3. Do not mount near gas or electric heaters.
4. Equipment should be mounted in locations and at heights where it will not readily be subjected to tampering by unauthorized personnel.
5. Use caution when servicing batteries. Battery acid can cause burns to skin and eyes. If acid is spilled on skin or eyes, flush acid with fresh water and contact a physician immediately.
6. The use of accessory equipment not recommended by manufacturer may cause an unsafe condition. Any modification or use of non-original components will void the warranty and product liability.
7. Do not use this equipment for other than intended use.
8. Servicing of this equipment should be performed by qualified service personnel only.
9. Disconnect AC power supply before servicing.
10. Unpack and check for concealed transit damage.
11. Report any transit damage to delivering carrier and file claim.


**Charging:** Charge unit for 24 hours prior to use. We recommend keeping units charged at all times in storage, remove from power press reset button to save battery prior to putting in case. Battery reset button will never disconnect battery during use and will always be ready for a charge.

NEVER CHARGE IN THE CASE.

**Note:** The LED strip light on the bottom of the unit can be rotated to set the direction of the light output. To do this, use a flat screwdriver and turn the knob (next to the test switch) on the side of the unit.

SAVE THESE INSTRUCTIONS!

Unit pre wired for 120VAC

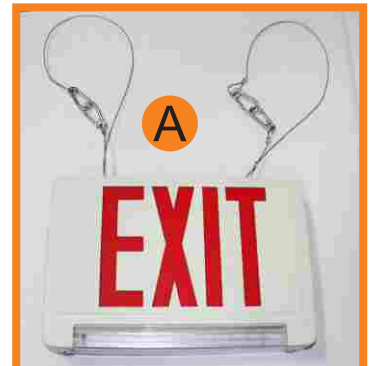



#### STANDARD



#### OPTIONAL



#### ILLUMINATION

- Ultra-bright, energy efficient white LED emergency lighting.
- 4.5W (36 LEDs x 0.125 watts) per light pipe
- Adjustable high-performance, smooth, chrome-plated, metallized reflector and acrylic, UV-stabilized "light pipe" lens for optimal light distribution.
- Long-life, energy efficient Red or Green LED exit sign illumination.

#### ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfers switch automatically connects the internal battery to LED board/light pipe for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capable standard.

#### MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.



#### HOUSING

- Injection-molded, engineering-grade, 5VA flameretardant, high-impact resistant, thermoplastic in white or black finishes.
- EZ snapout Chevron directional indicators.

#### OPTIONS

- SDT: Self-diagnostic test feature performs monthly, biannually, and annually test to ensure reliable operation and to meet electrical and life safety codes.

#### LISTING

- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for damp locations. (0°C – 50°C)

#### DIMENSIONS

